




sales@liftex.com
 (800) 299-0900
 www.liftex.com

SUPERTECHLON® ROUNDSLING CAPACITY CHART

Color	Part Number	Vertical (lbs)	Choker (lbs)	Basket (lbs)	Minimum Length	Approx. Diameter	Approx. Weight / Ft
PURPLE	ST-ENR-3000	3,000	2,400	6,000	3'	.63"	0.3 lbs.
GREEN	ST-ENR-6000	6,000	4,800	12,000	3'	.88"	0.4 lbs.
YELLOW	ST-ENR-9000	9,000	7,200	18,000	3'	1.13"	0.6 lbs.
TAN	ST-ENR-12000	12,000	9,600	24,000	3'	1.25"	0.7 lbs.
RED	ST-ENR-15000	15,000	12,000	30,000	3'	1.56"	0.9 lbs.
WHITE	ST-ENR-18000	18,000	14,400	36,000	3'	1.63"	1.0 lbs.
BLUE	ST-ENR-24000	24,000	19,200	48,000	3'	2.00"	1.7 lbs.
ORANGE	ST-ENR-30000	30,000	24,000	60,000	3'	2.56"	2.0 lbs.

* Chemically Active Environments can affect the strength of web slings in varying degrees; ranging from little to total degradation. Before ordering slings that are going to be used in a chemically active environment, have Liftex® Customer Service recommend the right sling for the right application.

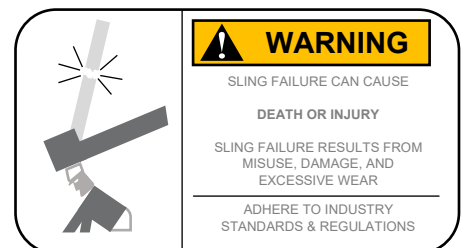

PROTECT SLINGS FROM CUTTING: Failure to protect slings from cutting may result in damage, injury or death. Contact Liftex® to discuss sling protection options.