



www.liftex.com
(800) 299-0900

PAC-FLEX CHAIN MESH SLING CAPACITIES & SPECIFICATIONS


Sling Type	Part #	Nominal Sling width	Rated Capacity (lbs)			Approx Weight (lbs)	
			Choker	Vertical	Basket	3' Sling	1' Body
Type II	PAC-4B	2"	-	6000	12000	7.9	1.8
Type I	PAC-4C	2"	6000	6000	12000	9.4	1.8
Type II	PAC-7B	4"	-	10000	20000	13.1	3.2
Type I	PAC-7C	4"	10000	10000	20000	15.2	3.2
Type II	PAC-5B/HD	4"	-	18000	36000	18.6	4.3
Type I	PAC-5C/HD	4"	18000	18000	36000	22.1	4.3
Type II	PAC-8B/HD	6"	-	30000	60000	26.8	6.3
Type I	PAC-8C/HD	6"	30000	30000	60000	31.9	6.3

PAC-FLEX FITTING DIMENSIONS (IN INCHES)

	A1	A2	B	D	Thickness
PAC-4	6.88	4.75	3.50	2.25	0.75
PAC-7	8.50	6.25	4.25	3.25	0.75
PAC-5HD	12.00	9.19	7.13	3.63	1.00
PAC-8HD	12.75	9.75	6.82	4.75	1.00


HOW TO ORDER

- Specify on Purchase Order:
- Sling Width
 - Sling Length
(pull to pull – see illustration)
 - Part Number

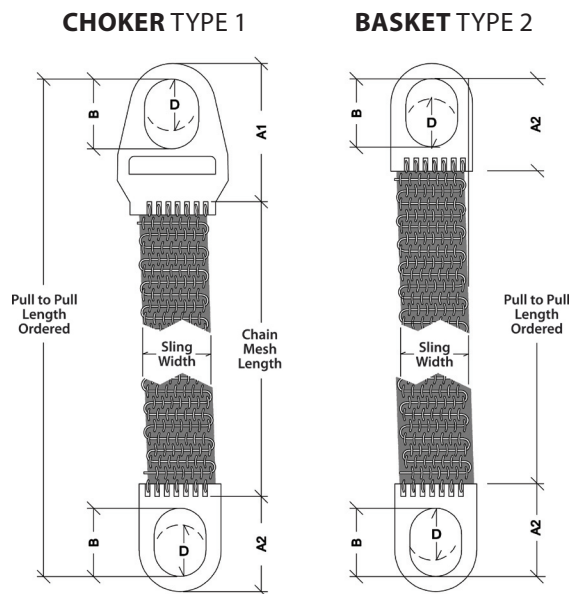

*Before ordering slings that are going to be used in a chemically active environment, contact Liftex® Customer Service, to recommend the right sling for the right usage.

Chemically Active Environments can affect the strength of webbing slings in varying degrees, ranging from little to total degradation.



WARNING

SLING FAILURE CAN CAUSE
DEATH OR INJURY
SLING FAILURE RESULTS FROM MISUSE, DAMAGE, AND EXCESSIVE WEAR

ADHERE TO INDUSTRY STANDARDS & REGULATIONS