



sales@liftex.com  
 (800) 299-0900  
 www.liftex.com


**CARGO INTEGRAL EYE CAPACITY CHART**

Part Number	Sling Width (inches)	Min. Sling Length (ft)	Rated Capacity Vertical Basket ONLY	Eye Width (inches)	Eye Length (inches)
CIE2-93	6	3	18,600	1.5	12
CIE4-93	6	4	37,200	1.5	12
CIE2-94	8	4	24,800	2	12
CIE4-94	8	4	44,000	2	12
CIE2-96	12	5	37,200	2	14
CIE4-96	12	5	66,000	2	20
CIE2-98	16	5	44,000	3	18
CIE4-98	16	6	88,000	3	24
CIE3-96	18	8	37,200	2	24
CIE6-96	18	8	66,000	3	30
CIE3-98	24	10	44,000	3	30
CIE2-912	24	10	66,000	5	30
CIE6-98	24	10	88,000	3	36
CIE4-912	24	10	132,000	6	36

**CARGO BRIDLE EYE CAPACITY CHART**

Part Number	Sling Width (inches)	Min. Sling Length (ft)	Rated Capacity Vertical Basket ONLY	Eye Width (inches)	Eye Length (inches)
CBE-680	6	3	8,000	1	6
CBE-880	8	3	8,000	1	6
CBE-1280	12	4	8,000	1	12
CBE-16100	16	4	10,000	1	12
CBE-18100	18	4	10,000	1	12
CBE-24100	24	5	10,000	1	18

\* Chemically Active Environments can affect the strength of web slings in varying degrees; ranging from little to total degradation. Before ordering slings that are going to be used in a chemically active environment, have Liftex® Customer Service recommend the right sling for the right application.

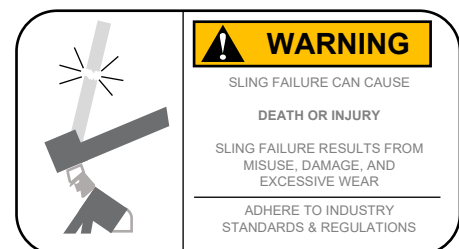

**PROTECT SLINGS FROM CUTTING:** Failure to protect slings from cutting may result in damage, injury or death. Contact Liftex® to discuss sling protection options.