




sales@liftex.com  
 (800) 299-0900  
 www.liftex.com

**TECHLON ROUNDSLING CAPACITY CHART**

Color	Part Number	Vertical (lbs)	Choker (lbs)	Basket (lbs)	Minimum Length	Approx. Diameter	Approx. Weight / Ft
Orange	T-ENR-40000	40,000	32,000	80,000	4 ft	3 in	2.1 lbs.
Orange	T-ENR-53000	53,000	42,400	106,000	4 ft	3-3/8 in	2.8 lbs.
Orange	T-ENR-60000	60,000	48,000	120,000	6 ft	3-1/2 in	3.2 lbs.
Orange	T-ENR-66000	66,000	52,800	132,000	6 ft	3-5/8 in	3.4 lbs.
Orange	T-ENR-70000	70,000	56,000	140,000	6 ft	3-3/4 in	3.8 lbs.
Orange	T-ENR-90000	90,000	72,000	180,000	6 ft	4-1/2 in	4.2 lbs.
Orange	T-ENR-100000	100,000	80,000	200,000	6 ft	4-3/4 in	4.7 lbs.

\* Chemically Active Environments can affect the strength of web slings in varying degrees; ranging from little to total degradation. Before ordering slings that are going to be used in a chemically active environment, have Liftex® Customer Service recommend the right sling for the right application.

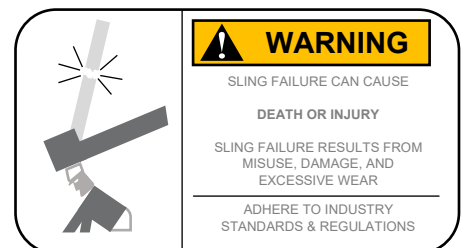

**PROTECT SLINGS FROM CUTTING:** Failure to protect slings from cutting may result in damage, injury or death. Contact Liftex® to discuss sling protection options.